

**Sunlite 85262 LED Portable Corncob Worklight Fixture, 60 Watts (250W Equivalent), 7,500 Lumens, 80CRI, 10 Foot Cord, Daisy Chain Outlet, On/Off Remote, IP64, 50,000 Hour Lifespan, UL Listed, 5000K Super White String Light**


**DESCRIPTION:**

LED Portable Corncob Worklight Fixtures from Sunlite provide a temporary lighting solution for large areas. Ideal for use at construction sites, work sites, garages, outdoors, and temporary structures in lieu of installing permanent fixtures. Multiple lights can be installed in a string with integrated daisy chain outlet. Each fixture has a standard 10 foot, 16AWG grounded cord and 6000V surge protection. Energy efficient, instant start LED technology will save money versus traditional high-pressure sodium fixtures. 5000K super white color temperature with a full 360 degree beam angle. Durable steel cage and plastic body with high-visibility orange colored canopy. Carrying/hanging handle and non-slip rubber feet for use as a standing fixture. LEDs on the bottom of the fixture provide down light when used overhead. Long 50,000 hour life span. On/off Remote control included. IP64 rated and UL Listed for Damp Location use. For use with 120 volt service.



**FEATURES:**

- **LED TEMPORARY LIGHTING** - LED Portable Corncob Worklight Fixtures from Sunlite provide a temporary lighting solution for large areas. Ideal for use at construction sites, work sites, garages, outdoors, and temporary structures in lieu of installing permanent fixtures.
- **FIXTURE TO FIXTURE CONNECTION** - Multiple lights can be installed in a string with integrated daisy chain outlet. Each fixture has a standard 10 foot, 16AWG grounded cord and 6000V surge protection.
- **7,500 LUMEN OUTPUT** - Bright 7,500 lumen output (250 watt HID light equivalent) at 5000K super white color temperature. LEDs on the bottom of the fixture provide down light when used overhead. Long 50,000 hour life span.
- **VERSATILE LIGHTING SOLUTION** - Built-in carrying/hanging handle and non-slip rubber feet on the bottom of the cage for use as a standing fixture.
- **UL LISTED** - Durable steel and plastic body with protective cage with high-visibility orange colored canopy. UL Listed to damp location use and IP64 rated. For use with 120 volt electrical service. Fixture measures is 6.90 inches in diameter, 12.09 inches high.

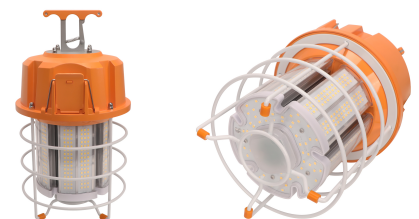

## SPECIFICATIONS:

### General Characteristics

<b>Average Rated Hours</b>	50000
<b>Finish</b>	Orange
<b>Average Life Span Years</b>	46
<b>Dimmable</b>	No
<b>Material</b>	Aluminum
<b>Lens Material</b>	Polycarbonate

### Electrical Characteristics

<b>Watts</b>	60
<b>Volts</b>	120
<b>Equivalent Wattage</b>	250
<b>LED Chip Manufacturer</b>	Samsung 2835
<b>Power Factor</b>	0.9
<b>Temperature</b>	-40?~45?

### Light Characteristics

<b>Lumens Brightness</b>	7500
<b>Color Rendering Index CRI</b>	80
<b>Emitted Color</b>	Super White
<b>Color Temperature Kelvin</b>	5000K
<b>Beam Angle</b>	320°
<b>Flicker</b>	Yes

### Fixture Characteristics

<b>Shape</b>	Round
<b>Number of Lights</b>	1
<b>Mounting</b>	Portable
<b>Fixture Technology</b>	LED
<b>Use Location</b>	Outdoor

### Additional Features

<b>Safety Rating Mark</b>	UL Listed - Damp Location
<b>Safety Rated For Canada</b>	Yes
<b>Safety Rated For USA</b>	Yes

### Product Dimensions

<b>MOL (in)</b>	12.09
<b>Diameter (in)</b>	6.93
<b>Item Dimension (in)</b>	(W) 7 (H) 13 (D) 7
<b>Item Weight (lb)</b>	4.450
<b>Package Dimension (in)</b>	(W) 13 (H) 8 (D) 8
<b>Package Weight (lb)</b>	5.580
<b>Cord Length</b>	120"

### Product Data

<b>Case Unit Rate</b>	4
<b>Item UPC</b>	653703852621
<b>Warranty Years</b>	5