



88786-SU

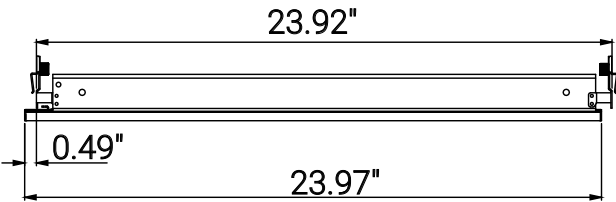

LFX/TGRID/2FT/D/10W/35K/14mm

T-Grid Fixture Sunl



Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog #: \_\_\_\_\_  
Date: \_\_\_\_\_  
Comments: \_\_\_\_\_

Technical Specifications

Photometrics

|                             |               |
|-----------------------------|---------------|
| Lumen                       | 1100          |
| Emitted Color               | Neutral White |
| Color Temp                  | 3500K         |
| Color Rendering Index (CRI) | 80            |
| Beam Spread                 |               |
| Lifespan                    | 50000         |

Electrical

|               |                   |
|---------------|-------------------|
| Watt          | 10                |
| Input Voltage | 100-277           |
| Power Factor  | 0.9               |
| Dimmable      | 0-10V Low Voltage |

Ratings / Certifications

|                       |           |
|-----------------------|-----------|
| Safety Certification  | UL Listed |
| DLC                   | False     |
| Operating Temperature | -20~40    |
| Warranty              | 5 Years   |

Construction

|                  |               |
|------------------|---------------|
| Fixture Material | Aluminum & Pc |
| Fixture Finish   | Matte Silver  |
| Lens Material    | Polycarbonate |
| Lens Finish      | White         |
| Shape            | Rectangle     |
| Mounting         | Surface       |