


Sunlite 89687 LED Commercial UFO High Bay Fixture, 240 Watts, 36000 Lumens, 5000k Super White, 70 CRI, UL Listed, Black, for Warehouses, Factories & Workshops

DESCRIPTION:

The LED Commercial UFO High Bay Fixtures from Sunlite are an energy efficient solution to your industrial lighting needs. Bright 36000 lumen equivalent to 240-watt metal halide or HPS output while only using 240 watts of electricity. 5000K Super White color temperature. Long 50,000-hour maintenance free life span. High color rendering at 70 CRI. Designed for use in warehouses, commercial garages, workshops, factories & retail spaces, or any commercial environment. UL Listed for wet location installation. DLC Listed. Tested Compatible Dimmers: Maxxima MEW-DM600LV, Eaton DF10P-C1, Keygma KGM-1A010V, Leviton IP710-DLZ & Lutron DVSTV-WH

FEATURES:

- **UPGRADE TO LED** - Replace older high bay lights with energy-efficient LEDs. These UFO-style fixtures feature a durable and lightweight die-cast body designed for pendant mounting that provides optimal heat dissipation. Great for new installations, too.
- **SUPER WHITE LIGHT** - Color temperature is 5000K Super White with a bright 36000-lumen output while only using 240 watts of electricity. Each fixture has 418 built-in LEDs.
- **LONG LIFE SPAN** - A long, 50,000-hour lifespan means years of reliable and maintenance-free service with no bulbs to replace. Benefit from significant energy savings over time.
- **DIMMABLE LED** - The fixture can be dimmed (1-10V Dimmable) when installed with an LED-compatible dimmer. High color rendering at 70 CRI. Tested Compatible Dimmers: Maxxima MEW-DM600LV, Eaton DF10P-C1, Keygma KGM-1A010V, Leviton IP710-DLZ & Lutron DVSTV-WH
- **UL LISTED** - UL Listed for wet location installation. High lumen output is designed in warehouses, commercial garages, workshops, factories, retail spaces, or any commercial environment. DLC Listed for design and quality. For use on 120-277-volt electrical systems. Includes 47.25" grounded cord.

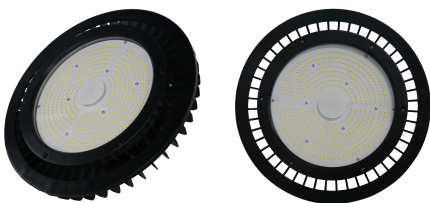

SPECIFICATIONS:

General Characteristics

Average Rated Hours	50000
Finish	Black
Average Life Span Years	46
Ingress Protection	IP65 (Dust-tight solids, Water jets)
Dimmable	Yes
Material	Aluminum
Lens Material	Glass
Lens Finish	Clear

Electrical Characteristics

Watts	240
Volts	120-277
Equivalent Wattage	240
LED Chip Manufacturer	SMD2835
Power Factor	0.9
Temperature	-20°to 50°

Light Characteristics

Lumens Brightness	36000
Color Rendering Index CRI	70
Emitted Color	Super White
Color Temperature Kelvin	5000K
Beam Angle	120°

Fixture Characteristics

Mounting	Pendant
Fixture Technology	LED
Use Location	Indoor

Additional Features

Safety Rating Mark	UL Listed - Wet Location
DLC	Yes
DLC Number	PP3VW80N
DLC Classification	Premium

Product Dimensions

MOL (in)	6.73"
Diameter (in)	12.60"
Item Dimension (in)	(W) 13 (H) 13 (D) 7.28
Package Dimension (in)	(W) 13 (H) 7.5 (D) 13
Package Weight (lb)	9.9
Canopy Width (in)	16"
Cord Length	47.25"

Product Data

Item UPC	653703896878
Warranty Years	5



ACCESSORIES:

Catalog # **89689-SU**
MS/LFX/HB

Catalog # **89690-SU**
EM/LFX/HB

Catalog # **89691-SU**
RC/LFX/HB

Catalog # **89692-SU**
C/LFX/HB

Catalog # **89693-SU**
PCR/LFX/HB

Catalog # **89694-SU**
PCL/LFX/HB



Catalog # **89698-SU**
WPC/LFX/HB